



Transformer TEM

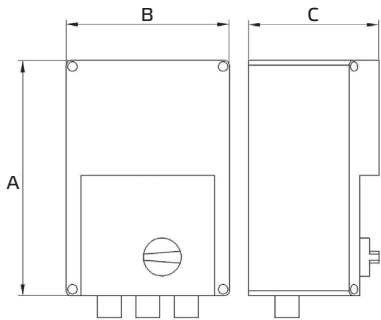

TEM 035, TEM 050, TEM 075
Plastic housing

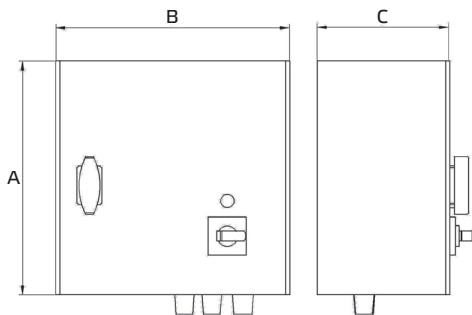

TEM 100, TEM 130
Metal housing




Type	ID	I _{max.} A	Fuse A	A mm	B mm	C mm	D mm	E mm	Weight kg
TEM 035	103502	3,5	5,0	255	170	140	155	194	4,6
TEM 050	103519	5,0	8,0	255	170	140	155	194	5,3
TEM 075	103507	7,5	12,5	305	200	140	183	236	7,8
TEM 100	103511	10,0	16,0	325	300	185	255	255	12,6
TEM 130	103950	13,0	18,0	325	300	185	255	255	15,1


- Transformer TEM
- 230 V ~, 50/60 Hz
- With motor protection
- Surface mounting
- Max. ambient temp 35 °C
- Protection Class IP 54

Type	Output voltage U _A V				
	1	2	3	4	5
TEM 035	110	140	170	200	230
TEM 050	110	140	170	200	230
TEM 075	110	140	170	200	230
TEM 100	110	140	170	200	230
TEM 130	110	140	170	200	230

Wiring diagram :

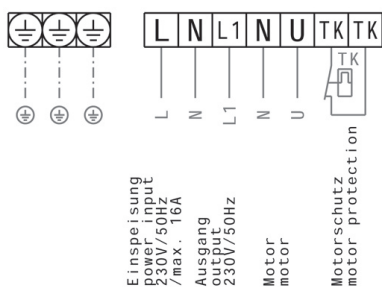

Mounting :



Legend
 U_A = Output voltage
 I_{max.} = Max. Operating Current